




COLPILAS
la Energía del Futuro
SOLAR

NO MERCURY ADDED	
Description	: Lithium Battery
Chemical System	: Lithium Manganese Dioxide
Nominal Voltage	: 3.0 Volts
Nominal Capacity	: 800mAh
Nominal Dimensions	: $\varnothing 15.3$ mm x 26.5 mm
Terminals	: Flat
Jacket	: PVC Resin Label
Shelf Life	: up to 10 years
Average Weight	: App. 10g
Application	: Photo
Operating Temperature	: -40°C to 60°C
Storage Temperature	: 10°C to 30°C and less than 60% relative humidity

Cross References:


GP	Duracell
CR2	DLCR2

Model No.: GPCR2

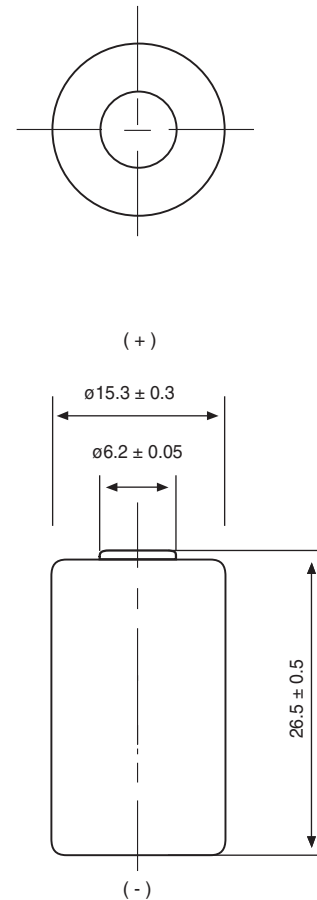


Unit : mm

Discharge Characteristics
900mA, 3 seconds on / 27 seconds off

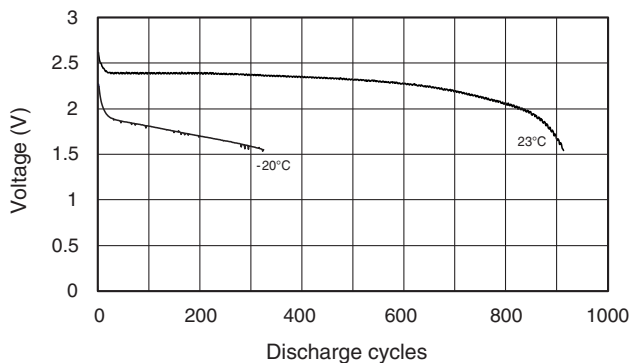

Continuous Discharge at 23°C

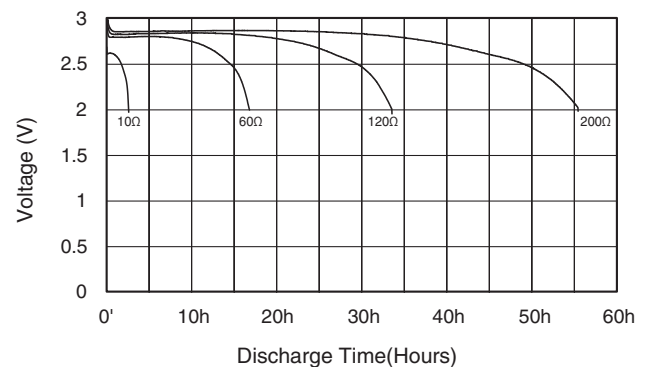

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.